

PROFESSIONAL FLOORING MANUFACTURER


BYFIT SURFACING

Premium Interlocking Tiles, High-Density Rolls, and Impact Mats for global fitness facilities.




Extreme Durability

HEAVY LOAD TESTED




Acoustic Control

NOISE REDUCTION




Eco-Friendly

RECYCLED MATERIAL



Impact Defense

SUBFLOOR PROTECTION

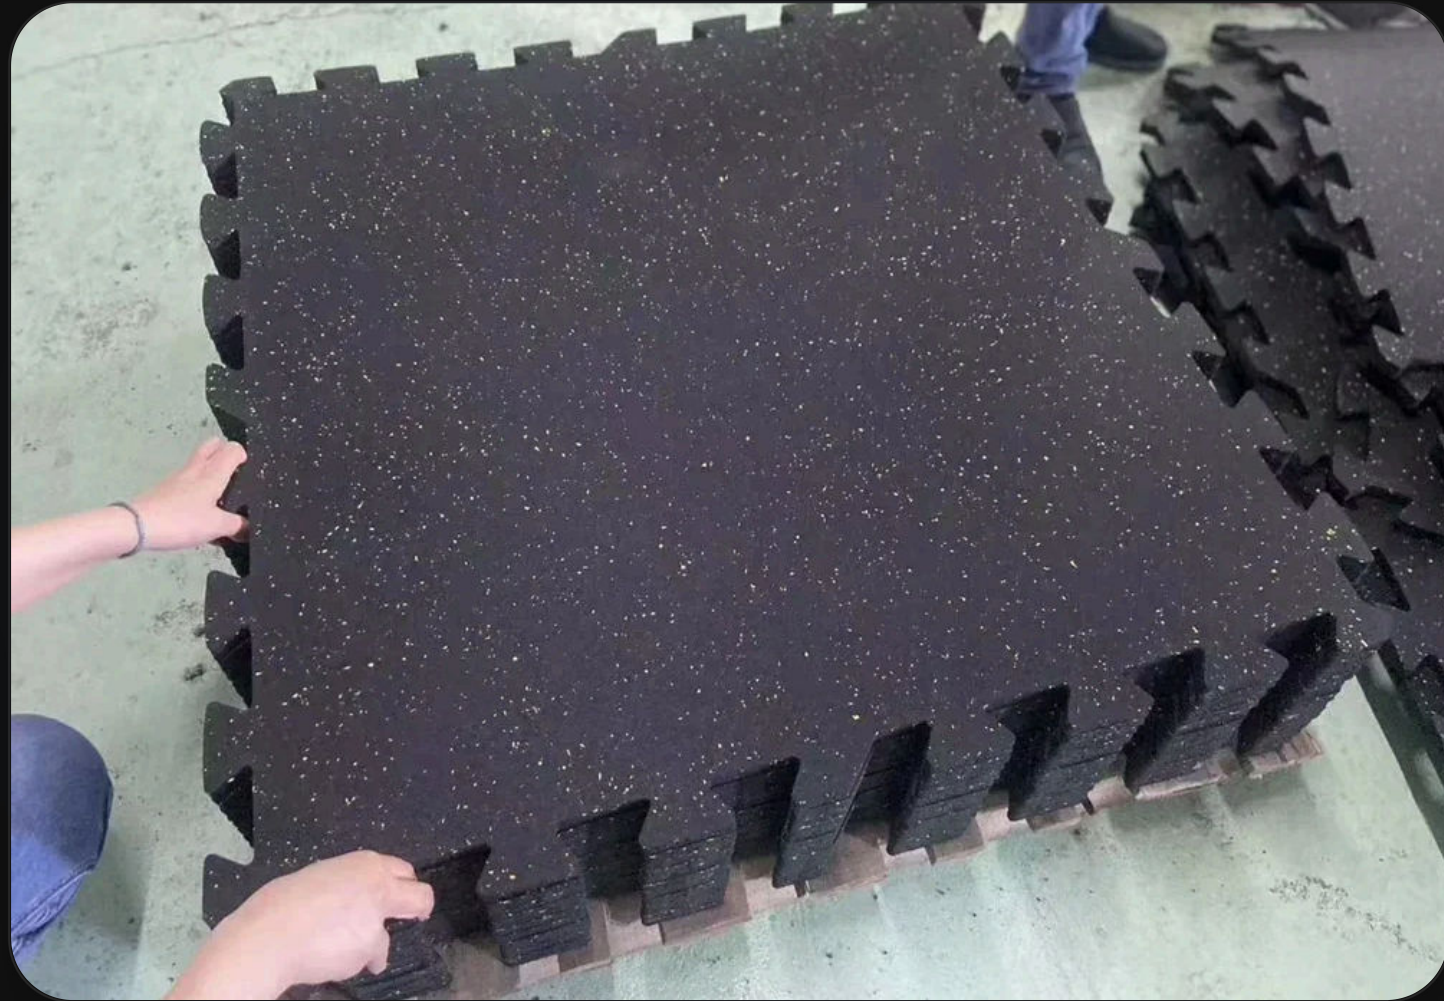

Interlocking Rubber Tiles

Our precision-engineered puzzle system provides a virtually seamless finish. Designed for easy installation without the need for adhesive, these tiles offer exceptional stability and a clean, professional look.

STANDARD DIMENSIONS

📏 960 × 960 mm

📏 480 × 480 mm

AVAILABLE THICKNESS

15mm

20mm

25mm

30mm

40mm

50mm

Premium Rubber Rolls

Ideal for large-scale fitness centers and high-traffic corridors. Our rubber rolls provide a sleek, uniform surface with minimal seams, offering superior underfoot comfort and long-lasting durability.

STANDARD WIDTH

1m / 1.25m

ROLL LENGTH

10m - 20m

THICKNESS RANGE

3mm

4mm

5mm

6mm

7mm

8mm

9mm

10mm

11mm

12mm

13mm

14mm

15mm





High-Density Impact Mats

Built for heavy deadlift platforms and drop zones. These mats feature ultra-high density composition to absorb kinetic energy and protect both your equipment and your structural flooring.

MATERIAL DENSITY

900 - 1050 kg/m³

Industrial grade density for maximum structural integrity under extreme pressure.


TENSILE STRENGTH

> 3.5 MPa

Superior tear resistance designed to withstand heavy commercial equipment.

Color Customization

Standard black base with premium EPDM flecks. Custom colors and density blends available for bespoke projects.




Standard Black

100% SBR




Blue Speckle

15% EPDM



Grey Speckle

15% EPDM




Red Speckle

15% EPDM



Yellow Speckle

15% EPDM



Green Speckle

15% EPDM

PRO TIP: Custom EPDM color combinations (up to 3 colors mixed) are available for orders over 500 sqm.

Technical Specifications

Rigorous testing ensures compliance with international athletic standards.

PROPERTY	TEST METHOD	PERFORMANCE
Hardness (Shore A)	ASTM D2240	60 - 65
Shock Absorption	EN 14808	> 35%
Fire Classification	EN 13501-1	Class Efl
Slip Resistance	AS 4586	Class P5

ELEVATE YOUR FACILITY


Ready to upgrade your gym with professional-grade flooring? Contact us for technical support, custom colors, and factory-direct pricing.

[📄 Get Quote Now](#)

[📄 Technical PDF](#)

SHANDONG BYFIT TRADE CO., LTD.

© 2024 Shandong Byfit. All Rights Reserved.



CE Certified | ISO 9001:2015 | REACH Compliant